

511,789

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number  
**WO 03/086598 A1**

(51) International Patent Classification: **B01F 7/16,**  
7/22, 7/32

(21) International Application Number: PCT/NZ03/00066

(22) International Filing Date: 15 April 2003 (15.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
518432 16 April 2002 (16.04.2002) NZ

(71) Applicant (for all designated States except US): **AGRE-  
SEARCH LIMITED** [NZ/NZ]; East Street, Ruakura  
Campus, Hamilton (NZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HARRIS, Mark,**

**Beaven** [NZ/NZ]; 8 Radiata Street, Hamilton (NZ).  
**RITCHIE, Thomas, Stuart** [NZ/NZ]; 217 Grandview  
Road, Hamilton (NZ).


(74) Agents: **LEWIS, Mardi, L.** et al.; Level 3, Spicers Build-  
ing, 329 Durham Street, P.O Box 2201, Christchurch (NZ).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: A HOMOGENISER

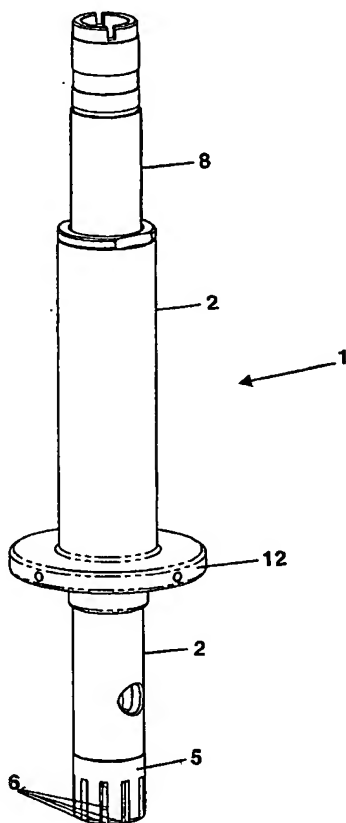

(57) Abstract: A homogeniser (1) including: a housing; a drive mechanism (3) lo-  
cated within said housing (2); and a cutting element (4) attached to said drive mech-  
anism (3), characterised in that at least part of said drive mechanism (3) is reversibly  
movable within said housing (2) between a position in which said cutting element (4)  
is located within said housing (2) and a position in which the cutting element (4) at  
least partially projects outside said housing (2) and thereby cleaning of same.

WO 03/086598 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*